


Installation dimensions in mm

Clamping force ¹⁾ kN	Mounting thread J	Minimum thread depth J2	Manifold O-ring ²⁾ ARP number or inside Ø x thickness
2,2	M5 x 0,8	16,5	568-010
5,6	M6 x 1,0	16,5	568-011
9,0	M6 x 1,0	15,0	4,32 x 3,53
11,6	312-24 UNF	20,3	568-011
18,7	M8 x 1,0	17,0	4,32 x 3,53
33,8	M10 x 1,25	18,8	4,32 x 3,53




¹⁾ With standard clamp arm.

²⁾ Polyurethane, 92 Durometer

Note: Mounting bolts and O-rings included.






-22, 52, 121

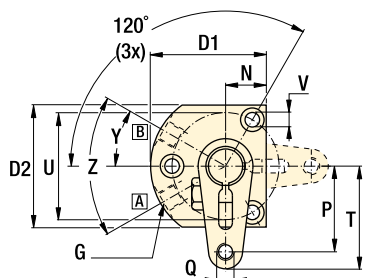

A = Clamping
B = Unclamping (venting)

-92, 202, 352

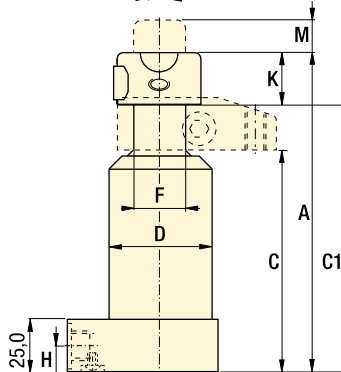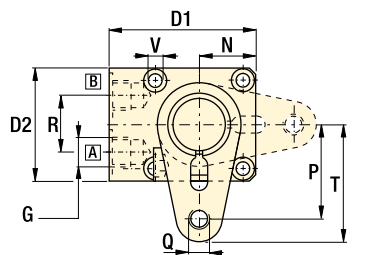


Force: 2,1 - 33,8 kN

Stroke: 16,5 - 32,6 mm

Pressure: 35 - 350 bar

- E** Cilindros giratorios
- F** Vérins de bridage pivotants
- D** Schwenkspannzylinder



Options

Clamp arms

32



Work supports

43



Collet-Lok®
swing cylinders

12



Accessories

86



Important

30, 45, and 60 degree rotations are available upon request. Add -30, -45 or -60 to end of standard model number to order directly from Enerpac. To order rotation limiter separately, see page 32.

Custom cylinders including longer stroke lengths are available on request.

In case there is a risk of machining coolants and debris being inhaled via the breather vent, it is recommended to pipe this port to an area outside the fixture that is protected from machining coolants and debris.

Do not exceed maximum flow rates.

N	P	Q	R	S	T	U	V	X	Y	Z	kg	Right turning models
ø												
Single acting ▼												
15,5	24,5	M6 x 1	-	21,0	31,0	40,1	5,8	18,1	30°	60°	0,5	SLRS-22
19,1	40,0	M8 x 1,25	-	41,0	48,0	50,0	6,9	14,4	30°	60°	1,1	SLRS-52
26,4	45,1	M10 x 1,5	25,9	23,7	56,1	41,9	6,6	28,7	-	-	2,0	SLRS-92
25,1	51,4	0,375-16 UNC	-	52,0	62,0	63,5	8,9	18,2	30°	60°	1,6	SLRS-121
34,4	55,2	M12 x 1,75	25,9	29,1	70,4	55,1	8,4	35,1	-	-	3,5	SLRS-202
43,4	67,9	M16 x 2	26,0	34,4	82,9	70,0	10,8	41,6	-	-	5,5	SLRS-352
Double acting ▼												
15,5	24,5	M6 x 1	-	21,0	30,9	41,9	5,7	18,1	30°	60°	0,5	SLRD-22
19,1	40,0	M8 x 1,25	-	41,0	47,9	50,0	6,8	14,4	30°	60°	1,1	SLRD-52
26,4	45,1	M10 x 1,5	26,0	23,7	56,0	42,0	6,5	28,6	-	-	2,0	SLRD-92
25,1	51,4	0,375-16 UNC	-	52,0	61,8	63,5	8,8	18,2	30°	60°	1,6	SLRD-121
34,4	55,2	M12 x 1,75	26,0	29,1	70,2	55,0	8,5	35,1	-	-	3,5	SLRD-202
43,4	67,9	M16 x 2	26,0	34,4	82,9	70,0	10,8	41,6	-	-	5,5	SLRD-352